


| TOLERANCES (UNLESS SPECIFIED) | |
|----------------------------------|--------|
| 0-10mm | ±0.2mm |
| 10.1-50mm | ±0.5mm |
| 50.1-250mm | ±1.0mm |
| >250mm | ±2.0mm |

VARIAC

MODEL CMV10E-3
 INPUT 415V
 OUTPUT 1 100%
 OUTPUT 2 112%
 RATED 10A PER PHASE
 ENCLOSED IP22
 COLOUR RAL7032

TERMINATIONS M4 STUDS
 A LIVE I/P FOR 100% O/P
 B LIVE I/P FOR 112% O/P
 C NEUTRAL I/P AND O/P
 D CENTRE TAP
 (FOR BUCK-BOOST)
 E LIVE O/P (VARIABLE)

KNOCK OUT DISCS IN BASE
 OF UNIT FOR CABLE ENTRY

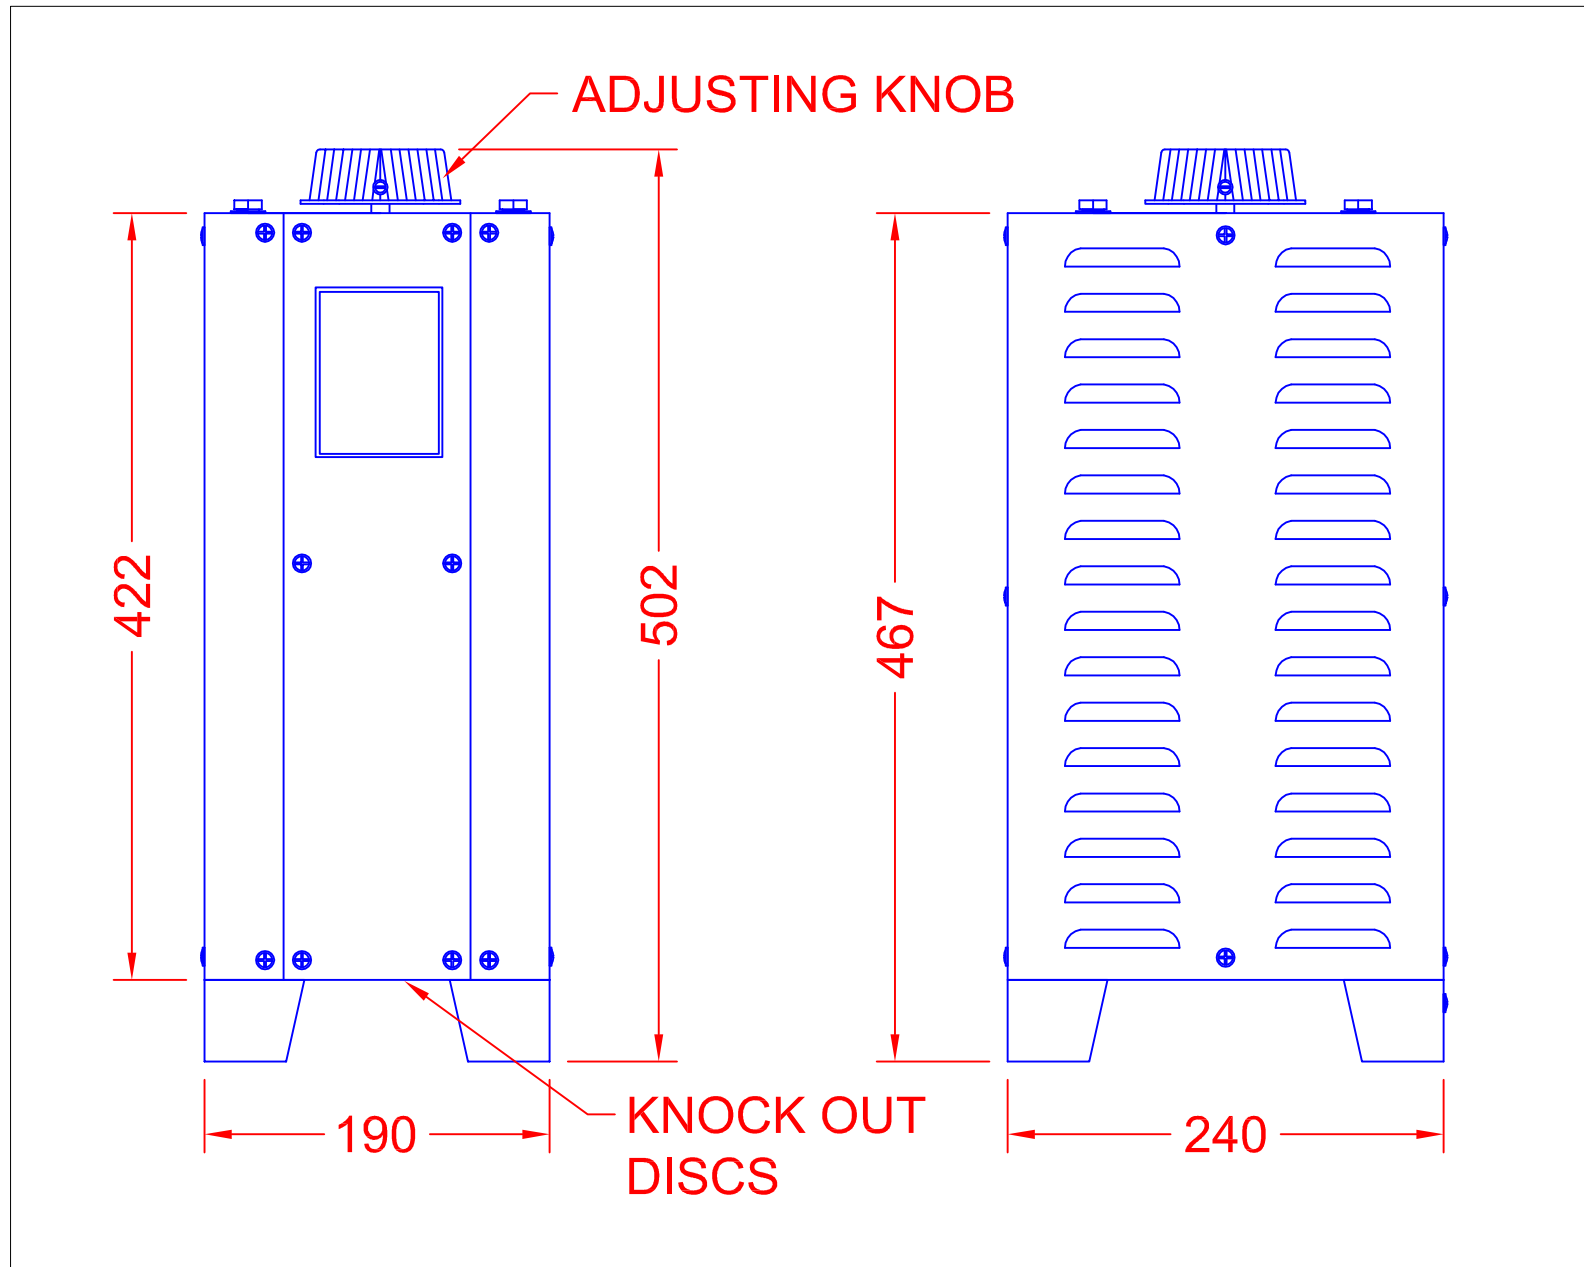

| REV | |
|-----|--|
| 4 | |
| 3 | |
| 2 | |
| 1 | |

CARROLL & MEYNELL
 TRANSFORMERS LIMITED
 TEL: 01642 617406 FAX: 01642 614178
 enquiries@carroll-meynell.com

TITLE
 3PH VARIAC
 CMV10E-3
 ALL DIMENSIONS IN mm

| DRAWN | PROJECTION | DATE | SCALE |
|---------|------------|--------|-------|
| SH | | 30/4/8 | NTS |
| DRAW No | REV | PAGE | |
| 6102 | 0 | 1/1 | |