


TOLERANCES (UNLESS SPECIFIED)	
0-10mm	±0.2mm
10.1-50mm	±0.5mm
50.1-250mm	±1.0mm
>250mm	±2.0mm

VARIAC

MODEL CMV20E-3
 INPUT 415V
 OUTPUT 1 100%
 OUTPUT 2 112%
 RATED 20A PER PHASE
 ENCLOSED IP22
 COLOUR RAL7032

TERMINATIONS M5 STUDS
 A LIVE I/P FOR 100% O/P
 B LIVE I/P FOR 112% O/P
 C NEUTRAL I/P AND O/P
 D CENTRE TAP
 (FOR BUCK-BOOST)
 E LIVE O/P (VARIABLE)

KNOCK OUT DISCS IN BASE
 OF UNIT FOR CABLE ENTRY

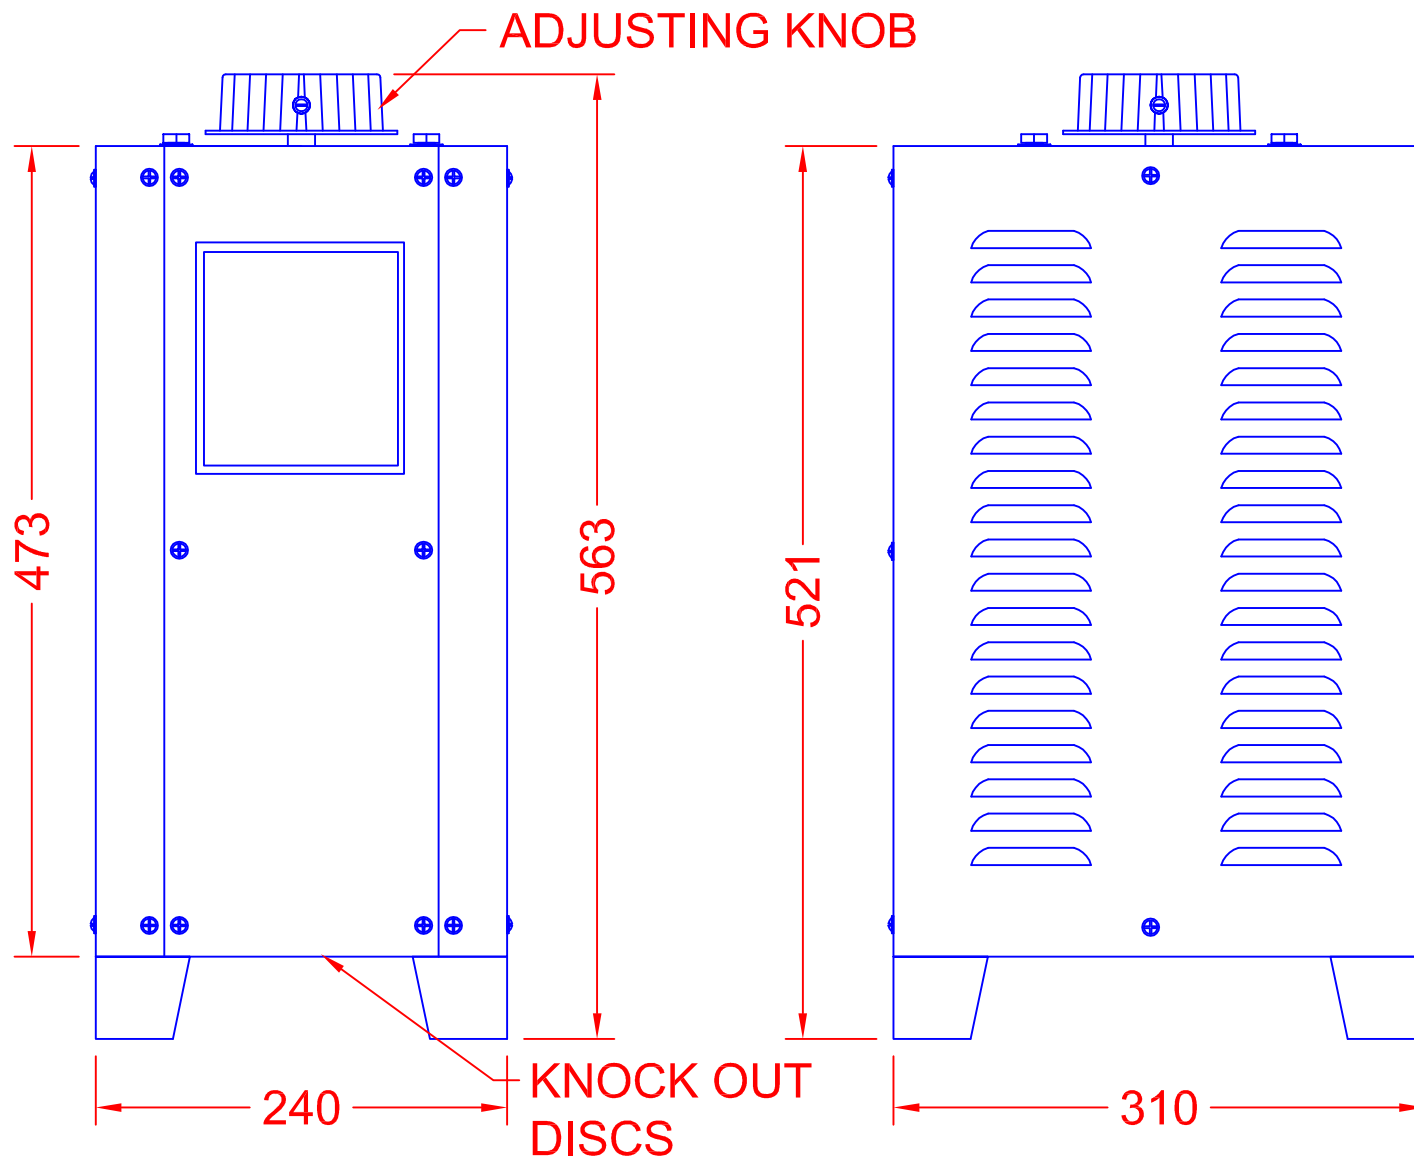

REV	
4	
3	
2	
1	

CARROLL & MEYNELL
 TRANSFORMERS LIMITED
 TEL: 01642 617406 FAX: 01642 614178
 enquiries@carroll-meynell.com

TITLE
**3PH VARIAC
 CMV20E-3**
 ALL DIMENSIONS IN mm

DRAWN	PROJECTION	DATE	SCALE
SH		30/4/8	NTS
DRAW No	REV	PAGE	
6104	0	1/1	