
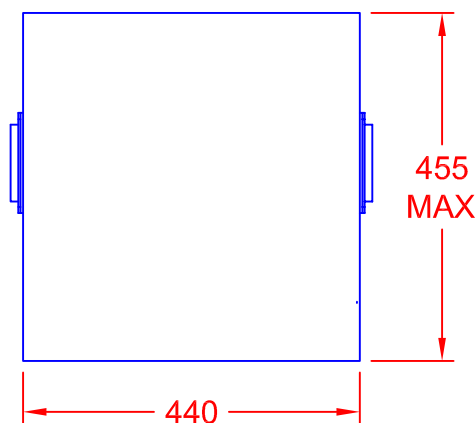
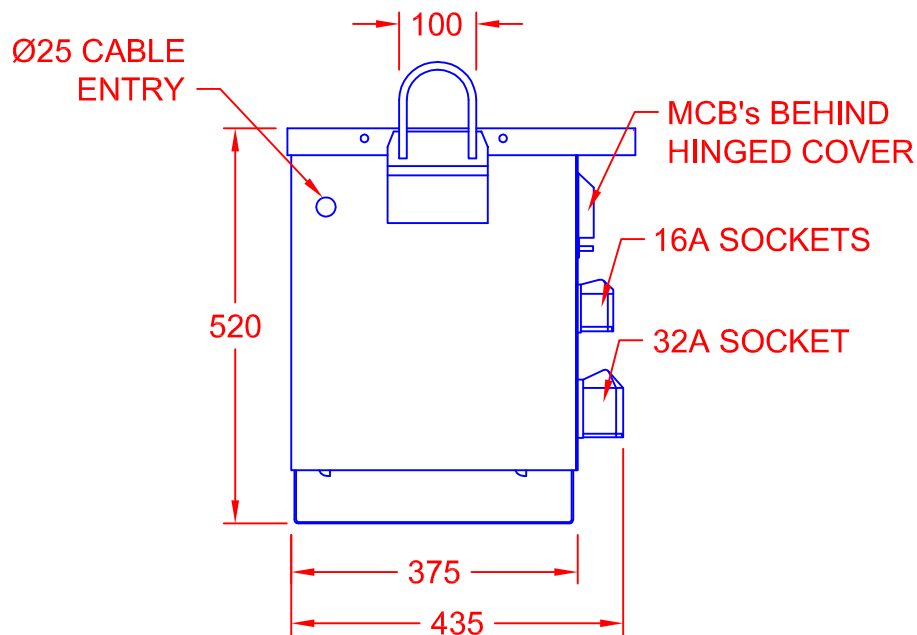


TOLERANCES (UNLESS SPECIFIED)	
0-10mm	±0.2mm
10.1-50mm	±0.5mm
50.1-250mm	±1.0mm
>250mm	±2.0mm

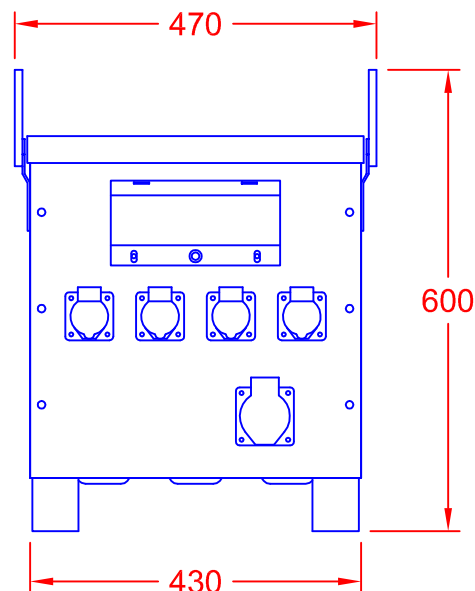

PORTABLE SITE ISOLATION TRANSFORMER

TYPE	SINGLE PHASE
MODEL	CM5K/15
INPUT	230V, 50Hz
OUTPUT	55V-0-55V CENTRE TAP EARTHED
RATING	5kVA CONTINUOUS
SOCKETS	4 OFF 16A (BS EN 60309) 1 OFF 32A (BS EN 60309)
PROTECTION	
INPUT	2 POLE 32A
OUTPUT	2 OFF 2 POLE 20A 1 OFF 2 POLE 32A
ENCLOSURE	MILD STEEL RATED IP22
COLOUR	YELLOW

REV	4	
	3	
	2	
	1	

CARROLL & MEYNELL
TRANSFORMERS LIMITED
TEL: 01642 617406 FAX: 01642 614178
enquiries@carroll-meynell.com

TITLE	SITE BOX SUPPLY CM15K/5
ALL DIMENSIONS IN mm	

DRAWN	SH	PROJECTION	DATE	SCALE
			12/5/8	NTS
DRAW No	3283	REV	0	PAGE
				1/1