
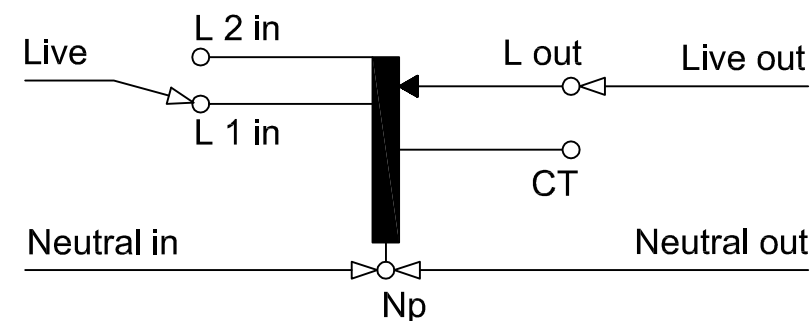
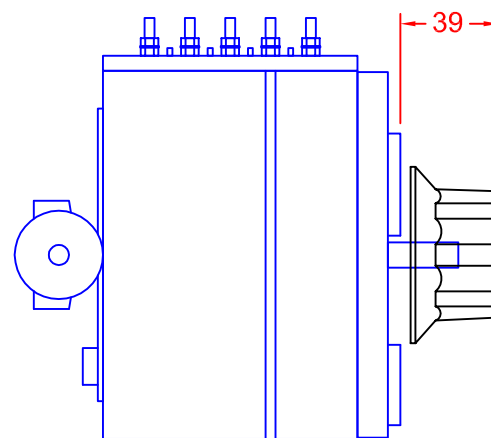

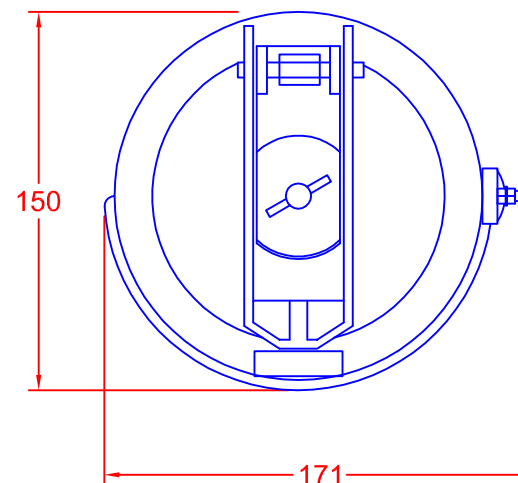
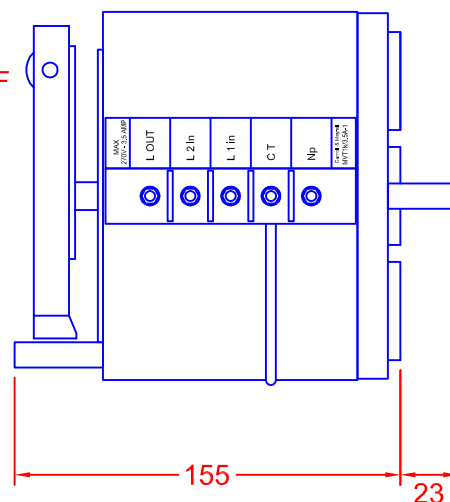


TOLERANCES (UNLESS SPECIFIED)	
0-10mm	±0.2mm
10.1-50mm	±0.5mm
50.1-250mm	±1.0mm
>250mm	±2.0mm

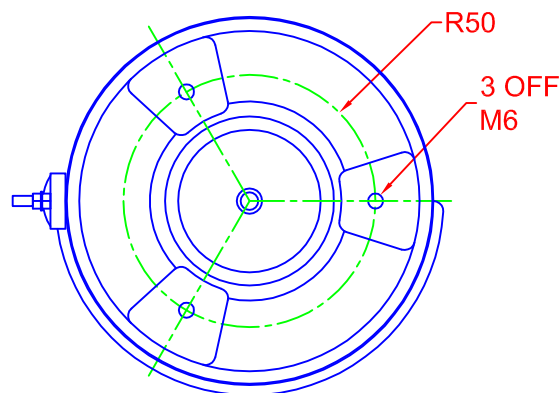

SINGLE PHASE VARIABLE AUTOTRANSFORMER

MODEL: MVT1k/3.5A-1

INPUT: UP TO 240V, 50/60Hz

OUTPUT: 0-100% OF INPUT (USE L 2 in) OR
0-112% OF INPUT (USE L 1 in)

RATING: 1.0kVA AT 270V, 3.5A MAX

TERMINATION: M4 THREADED STUDS

REV	
4	
3	
2	
1	STUD TERMINALS, GB 5/10/17

CARROLL & MEYNELL
TRANSFORMERS LIMITED
TEL: 01642 617406 FAX: 01642 614178
enquiries@carroll-meynell.com

TITLE
VARIABLE TRANSFORMER 3.5A
ALL DIMENSIONS IN mm

DRAWN	PROJECTION	DATE	SCALE
GB		22/12/15	NTS
DRAW No	REV	PAGE	
5779	1	1/1	